




Powering Productivity.

Durable, efficient, and built to last, the ECOSYS PA2101cwx is the perfect fit for your home office, facilitating smoother remote collaboration with cloud connectivity and mobile print functionality.

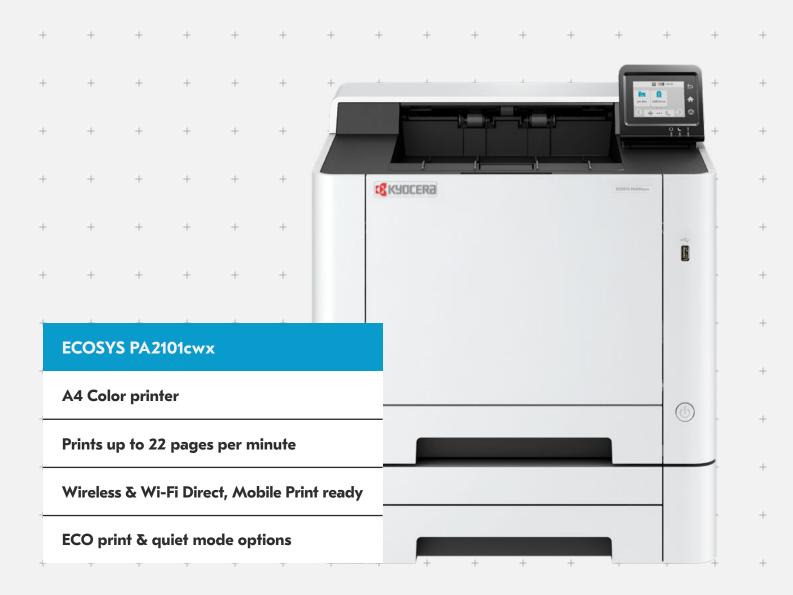

ECOSYS PA2101cwx

BASIC SPECIFICATIONS

Configuration: A4 color printer

Pages per Minute: Letter: 22 ppm black / color; Legal: 18 ppm black / color; A4: 21 ppm black / color

Display: 2.7" Color Touch Screen Control Panel (TSI)
Warm Up Time: 32 seconds or less from main power on
First Page Out Time:

Print: Black: 11 seconds or less; Color: 12.5 seconds or less

Resolution: 600×600 dpi, 1200×1200 dpi (At reduced speed) **Memory:** Standard: 1GB , Non-upgradable

Duplex: Standard Stackless Duplex Supports Statement to Legal (5.5" x 8.5" - 8.5" x 14"), 16 - 32 lb Bond (60 — 120 gsm) Dimensions / Weight: 16.1" W x 16.1" D x 13.0" H / 46.2 lbs Monthly Print Volume: 65,000 Pages per Month Standard Output Tray: 150 Sheets

POWER CONSUMPTION

Electrical Requirements: 120 V, 60 Hz, 8.6 A
Typical Electricity Consumption (TEC): 120 V: 0.22 KWh/week
Maximum (including Options): 120 V: 0.22 KWh/week

Printing: 120 V: 345 W Ready Mode: 120 V: 33 W Sleep Mode: 120 V: 0.3 W Power Off: 120 V: 0.1 W

CONTROLLER SPECIFICATIONS

Standard Controller: (ARM) Cortex-A53 single core 1.0 GHz PDLs / Emulations: PRESCRIBE, PCL6(PCL.5c/PCL-XL), KPDL3 supporting AES, PDF Direct Print, XPS / OpenXPS Direct Print Direct Print USB: PDF, TIFF, JPEG, XPS and Open XPS Fonts: 93 Scalable Fonts for PCL6, 134 True Type Fonts for KPDL3, Bitmap Font, 79 fonts: processed as outline font

Windows OS Compatibility: Windows 11 (64 bit, ARM 64 bit), Windows 10 (32 bit, 64 bit, ARM 65 bit), Windows Server 2022 (64 bit), Windows Server 2019 (64 bit), Windows Server 2016 (64 bit), Windows Protected Print (WPP), Microsoft Universal Print Mac OS Compatibility: Apple Macintosh OS X 10.9 or later Chrome OS: Version 118 or Higher

Linux Printer Driver: Ubuntu 20.04 or higher, Debian 11 or higher, OpenSUSE 15.5 or higher, Fedora 39 or higher, CentOS Stream 9 or higher

Interface: 10/100/1,000 base, 802.11a/b/g/n/ac, Wi-Fi Direct, USB 2.0

Network Print and Supported Protocols: TCP/IP V4/V6, NetBEUI, FTPS, LPR, Port9100, IPPS, WSD, SMTP, POP, SNMPv3, SIEM

LOCAL AND NETWORK AUTHENTICATION

Security: IPsec, HTTPS, SNMPv3, IPPS, POP over SSL, FTPS and LDAPS. SMTP over SSL

Drivers: KX Driver, PCL Uni Driver, KPDL Uni Driver, MAC Driver, Linux Driver, ChromeOS Driver

Utilities: KYOCERA Net Direct Print, KYOCERA Mobile Print, KYOCERA Print Center, KYOCERA Device Manager, KYOCERA Net Viewer, Quick Network Setup, Removal Tool, Wi-Fi Setup Tool

JOB MANAGEMENT

Job Accounting, 20 Department codes

Additional Print Features: Private Print and EcoPrint

Multi Language Support: English, German, Italian, French,

Spanish, Portuguese, Dutch, Russian

SCAN SPECIFICATIONS

Connectivity / Supported Protocols: 10/100/1000BaseTX, TCP/IP, Hi-Speed USB 2.0, 802.11a/b/g/n/ac, Wi-Fi Direct

PAPER SUPPLY

Standard Paper Sources: Single 250 Sheet Drawer, 50 sheet Multipurpose Tray

Standard / Maximum Paper Sources: 2 / 3 including Multipurpose Tray

Standard / Maximum Paper Capacity: 300 Sheets / 550 Sheets

Standard Paper Drawer Size / Weight: Letter, Legal, Statement, A4, A5, A6, B5, Custom 16 lb Bond - 90 lb Index (60 - 163 gsm)

Standard Duplex Paper Drawer Size / Weight: Letter, Legal, Executive, Statement, A4, A5, A6, B5, B6, Custom (60 - 120 gsm) Multi-Purpose Tray Paper Size / Weight: Letter, Legal, Executive, Statement, A4, A5, A6, B5, B6, Custom 16 lb Bond — 120 lb index (60 - 220 gsm)

Input Materials: Plain paper, Recycled paper, Coated paper, Thick papers, Thin papers, Labels, OHP, Envelopes Output Capacity: 150 Sheets

PAPER HANDLING OPTIONS

PF-5110, Paper Feed Cassette (250 sheets)

Paper Size / Weight: Letter, Legal 16 lb Bond —

90 lb index (60 - 163 gsm)

Dimensions / Weight: 16.5" W x 19" x 6" / 8.2 lbs

CONSUMABLES

Black Toner: TK-5492 K for 2,800 Cyan Toner: TK-5492 C for 2,400 Magenta Toner: TK-5492 M for 2,400 Yellow Toner: TK-5492 Y for 2,400

Black Toner: TK-5482 K for 1,250 Cyan Toner: TK-5482 C for 1,250 Magenta Toner: TK-5482 M for 1,250 Yellow Toner: TK-5482 Y for 1,250

ADDITIONAL OPTIONS

KNM, UG-33
Security: Card Authentication Kit(B)
UG-51: TPM (Trusted Platform Module)
SD Card: 1 port, SD/SDHC

Specifications and design are subject to change without notice. For the latest on connectivity visit kyoceradocumentsolutions.us. ECOSYS, PRESCRIBE, Kyocera Net Manager, Kyocera Net Viewer, Kyocera Device Manager, PDF Direct Print, Command Center RX, and KX Driver are trademarks of The Kyocera Companies. Mac OS and AirPrint are trademarks of Apple, Inc. Mopria is a trademark of Mopria Alliance, Inc. Windows is a trademark of Microsoft, Inc. All other trademarks are the property of their respective owners.

KYOCERA Document Solutions America 225 Sand Road, PO Box 40008 Fairfield, New Jersey 07004-0008, USA Tel: 973-808-8444





kyoceradocumentsolutions.us