

Digital Full Color Production Printers

# RICOH Pro C5410S/C5400S

Copier  Printer  Facsimile  Scanner

**RICOH**  
imagine. change.

**Electronic Office**  
S Y S T E M S

NEW IDEAS. NEW SOLUTIONS.

330 Fairfield Road Fairfield, NJ 07004

www.eosnj.com PH: (973) 808-0100



**RICOH Pro  
C5410S**

**80**  
ppm  
black & white  
and full-color

**RICOH Pro  
C5400S**

**65**  
ppm  
black & white  
and full-color


# The versatility to color your world.

Need a printer that delivers professional-grade results within a flexible footprint?

**Look no further than the  
RICOH Pro C5410S/C5400S.**

The RICOH Pro C5400S Series enables print service providers (PSPs), in-plants, graphic designers, and marketing departments to produce consistent repeatable outcomes by adapting to your unique printing requirements, no matter the industry. Delivering exceptional image quality, flexible media handling, and advanced finishing options, this series empowers you to take on more jobs and grow your business.

Whether you're producing essential business documents, high-impact marketing materials, or innovative applications, the RICOH Pro C5410S/C5400S empower you to print efficiently, securely, and with outstanding quality — every time. An intuitive graphic user interface makes operation effortless, allowing your team to work smarter, not harder. Advanced security features help ensure your data stays protected for worry-free printing.

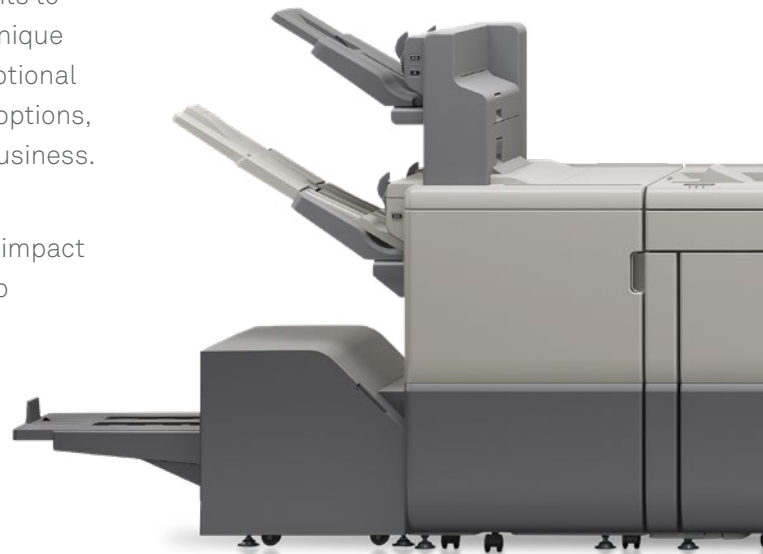

**RICOH**



# Driving sustainability for our future.

The RICOH Pro C5410S/C5400S sets a new standard for eco-friendly production printing—delivering top-tier performance while helping you meet your sustainability goals.

Its industry-leading design features 25% post-consumer recycled plastics and 21% electric furnace steel, reducing environmental impact without sacrificing durability. The innovative toner both enhances color accuracy and is eco-friendly, while sustainability features like the optional staple-less binding help minimize waste and eliminate the need to stock and dispose of staples.



**RICOH**

# The right features for innovative printing.



The RICOH Pro C5410S/C5400S redefines what's possible in digital color production, delivering exceptional results across every facet of your operation. These powerful yet compact systems provide the flexibility, reliability, and performance to meet your most demanding print challenges while supporting your long-term business growth.

## Performance & Quality

### Precision that drives your business forward

Engineered to meet the demands of commercial printing, the RICOH Pro C5410S/C5400S deliver consistently vibrant, high-resolution prints even in large volumes.

- Exceptional image quality with VCSEL Laser resolutions up to 2400 × 4800 dpi
- Enhanced registration to enable complex print applications
- Wide array of advanced inline finishing options to expand your offerings

## Media & Finishing

### Versatility meets efficiency

Flexible media handling and advanced finishing capabilities enable you to bring specialty jobs in-house, enhancing efficiency and reducing outsourcing costs.

- Supports oversize printing up to 13" x 51"
- Supports printing on a wide range of media up to 360gsm, including coated, text, linen, and cover stocks
- Boost your productivity and achieve exceptional output quality with the optional envelope fuser unit, ensuring greater performance and superior results for more efficient and impressive output when printing on envelopes
- Industry-leading staple-less binding up to 16 sheets creates an environmentally-friendly way to present documents



**RICOH**

# Productivity & Ease of Use

## Maximize uptime. Minimize effort.

Streamline workflows and maximize output with fast warm-up times, expandable paper capacity, and an intuitive user interface.

- Quick warm-up: Less than 30 seconds in standard mode
- High-speed output: Up to 80 ppm (C5410S) / 65 ppm (C5400S)
- Advanced scanning: Up to 150/300 ipm with single-pass color duplex
- Maximum paper capacity of 8,500 sheets
- Enhanced durability: Max monthly volume - 150K impressions, and a Print duty cycle\* - 1.5M. (Figures based on LT size sheets).
- Optional Trained Customer Replaceable units for maximized uptime performance
- Complete tasks quickly and easily using the user-friendly 10.1" Android™-based Smart Operation Panel

\* Maximum durable impressions per month that the printer can run. When the printer runs the Duty Cycle every month, 60 months guarantee cannot be applied.



# Managing a transitioning labor market.




The RICOH Pro C5400S Series' Smart Operator Panel and optional Fiery® Command WorkStation make it easy for operators of all skill levels to achieve professional results.

Simplify training, boost productivity, and improve profitability with a system designed to adapt to an evolving labor market.



Watch the RICOH Pro C5400S Series Product Video

- 1 Trimmer Unit TR5050\***  
Face Trim Unit for SR5120 Booklet Finisher
- 2 Booklet Finisher SR5120\***  
Produce full-color booklets in-house and in-line:  
Choose the 3,500-Sheet SR5120 Booklet Finisher to create saddle-stitch booklets up to 30 sheets/120 pages. For fully automated wire-bound booklets choose the GBC StreamWire°. For Square back booklets choose Plockmatic SBT° or PBM435e°.
- 3 High-Capacity Stacker SK5040\***  
A 5,000-sheet stacker with a rollaway cart quickly moves large output volumes to offline binding or packing and shipping.
- 4 Multi-Folding Unit FD5040\***  
Four-Position Inline Folding Unit
- 5 Cover Interposer Tray CI5040\***  
Two-tray Cover Interposer to easily feed preprinted inserts and covers into your workflow.

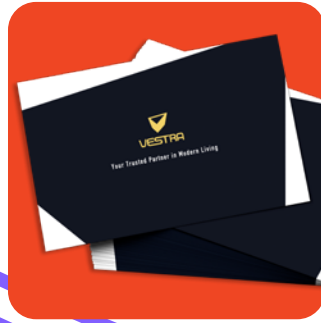

**6 Buffer Pass Unit Type S9\***

Reduce toner adhesion on stacked, coated paper when you use the optional Buffer Pass Unit to cool media before sending it to the finishing unit.

**7 Single-pass document feeder\***

Fast scanning - up to 150/300 ipm with single-pass color duplex, allowing you to scan documents as small as a business card.

**8 Vacuum Feed LCIT (RT5150)\***

Extend print runs and minimize interruptions by bridging three 4,400-sheet trays.

**9 Vacuum Feed Banner Sheet Tray Type S9\***

Adding the optional banner sheet tray provides input sizes up to 13" x 27.5".

**10 Multi Bypass Tray BY5020\***

Feed up to 500 sheets of specialty stocks, including sizes up to 19.2" (extends up to 13" x 27.5" by adding the optional Multi Bypass Banner Sheet Tray Type S9\*) and expand what you can offer customers.

**Be known for superb reproduction quality:**

Deliver brilliant color and smooth, subtle gradations with Vertical Cavity Surface Emitting Laser (VCSEL) and PxP-EQR toner technology.

**Trained Customer Replaceable Units° (TCRUs)**

allow you to execute routine maintenance on your schedule, ensuring the system is up and running when you need it most.

**Staple-less Binding\*°**

Industry-leading staple-less binding up to 16 sheets for minimized waste. Eliminate the need to stock and dispose of staples.

**Other advanced finishing options** such as the Plockmatic 435e/450e°, Plockmatic CT XL°, and GBC Streampunch Plus°.

**Dual Controller Options:**

The RICOH Pro C5400S Series offers the standard GW Controller and two Fieri® Controllers° options for environments with higher color management and processing power requirements.

*\*Optional*

*°Not shown*

# Power, precision, and performance— **optimized for production.**



## **Complement offset printing with digital capabilities**

Seamlessly balance traditional offset and high-quality digital printing with the RICOH Pro C5400S Series. Handle short-run and reprint jobs with speed, precision, and cost-efficiency, reducing reliance on manual workflows while maintaining superior image quality and color consistency.



## **Expand your print capabilities**

Optimize your print operation with your choice of two Fiery® controllers built on the secure FS-600 platform. Configure your setup with a variety of large capacity paper trays, long-sheet feeders, and professional finishing options to streamline production, consolidate workflows, and enable on-demand printing at multiple locations.



## **Enhanced registration for precision printing**

Designed with feedback from our most demanding customers, the RICOH Pro C5400S Series offers precise front-to-back and page-to-page alignment. Our new and improved mechanical registration system delivers precision unprecedented in its product class, making it ideal for applications requiring pinpoint accuracy.



## Wide range of substrates for limitless creativity

Handle diverse print applications effortlessly with support for media up to 360gsm. Whether you're printing on bond, coated, textured, carbonless, or synthetic stocks, the RICOH Pro C5400S Series offers seamless integration with its onboard media catalog, allowing you to expand your offerings without compromising quality.



## Uncompromising quality, every time

Deliver stunning, consistent print outcomes with Ricoh's advanced color management tools. The RICOH Pro C5400S Series maintains exceptional color fidelity and crisp resolution across every job, ensuring your materials are always professional and impactful.



## Inline professional finishing

Automate and streamline finishing with inline options for saddle stitching, square folding, stacking, punching, multi-folding, and more. The RICOH Pro C5400S Series helps you eliminate bottlenecks in your workflow and reduces the need for manual intervention, enhancing efficiency and accelerating time to market.

# RICOH Pro C5410S/C5400S

System specifications

## Specifications

<b>Standard Modes</b>	Copy/Print/Scan
<b>Print/Copy Process</b>	4 drum dry electrostatic transfer system with internal transfer belt Oil-less belt fusing method
<b>Fusing</b>	Color PXP-EQR Toner
<b>Toner</b>	Sensor and Optional Mechanical Registration
<b>Paper Registration</b>	220 sheets (81.4gsm)/250 sheets (64-68gsm) ADF with single-pass color duplex scanning at up to 300 ipm
<b>Document Feeder</b>	Optional
<b>Fax</b>	Full Color 10.1" Smart Operation Panel
<b>Operation Panel</b>	Pro C5410S: 80 ppm (52 - 256 gsm) 56 ppm (256.1 - 360 gsm) Pro C5400S: 65 ppm (52 - 256 gsm) 50 ppm (256.1 - 360 gsm)
<b>Output Speed (Letter)</b>	Pro C5410S: (FC) 9.6 sec or less, short time mode: 6.7 sec or less (B&W) 8.1 sec or less, short time mode: 6.4 sec or less Pro C5400S: (FC) 10.6 sec or less, short time mode: 7.7 sec or less. (B&W) 9.2 sec or less, Short time mode: 7.5 sec or less
<b>First Copy Output Time</b>	150K (based on A4/LT size paper) VCSEL***: 2400 x 4800 dpi Print: 1200 x 4800 dpi Copy: 600dpi (scan), 2,400 x 4,800 dpi (copy output) Scan: 600dpi/200dpi for network T/WAIN scan
<b>Max Monthly Volume</b>	1200 x 4800 dpi
<b>Resolution</b>	Copy: 600dpi (scan), 2,400 x 4,800 dpi (copy output) Scan: 600dpi/200dpi for network T/WAIN scan
<b>Paper Capacity</b>	Tray 1: 2,500 sheets (1,250 x 2) Trays 2 - 3: 550 x 2 Bypass Tray: 250 sheets
<b>Total Standard Paper Capacity</b>	3,850 sheets
<b>Total Max Paper Capacity</b>	8,500 sheets
<b>Paper Size</b>	Tray 1: 8.5" x 11" Trays 2 - 3: 3.94" x 5.5" to 13" x 19.2" Bypass: 3.94" x 5.5" to 13" x 49.6", Envelopes
<b>Paper Weight</b>	Trays 1 - 3: 14 lb. Bond - 110 lb. Cover (52 - 300 gsm) Bypass Tray: 14 lb. Bond - 130 lb. Cover (52 - 360 gsm*) Auto Duplex: 14 lb. Bond - 130 lb. Cover (52 - 360 gsm*)
<b>Warm-up Time</b>	Standard mode (def) Less than 30 seconds. Image Quality Mode Less than 120 seconds.
<b>Typical Electricity Consumption (TEC)*</b>	Pro C5400S: 5.811kWh/wk Pro C5410S: 7.323kWh/wk
<b>Standard Memory:</b>	SSD: 480GB x 2 on board / RAM: 8GB
<b>Max. Power Consumption ENERGY STAR 3.2</b>	Less than 3,840 W
<b>EPEAT</b>	Certified Gold Rated
<b>Power Requirements</b>	208 - 240V, 16A, 60 Hz (dedicated)
<b>Dimensions (W x D x H)</b>	31.46" x 34.65" x 64.88" (incl. ADF and Status Light Pole)
<b>Weight</b>	Less than 606.3 lbs. (275 kg)

\*Typical Electricity Consumption by ENERGY STAR program.  
\*\*\* Vertical Cavity Surface Emitting Laser

## Printer Controllers

<b>Fiery® Color Controller E-48B</b>	
<b>Fiery® System Version</b>	Fiery® FS600 Pro
<b>Configuration</b>	Server Type
<b>Memory</b>	8GB RAM (upgradable to 32GB)
<b>CPU</b>	Intel i3-12100 processor
<b>Storage</b>	240/256 GB NVMe SSD + 1TB HD SATA
<b>Operating System</b>	Windows 10 IoT Enterprise 2021 LTSC

<b>Fiery® Color Controller E-28B</b>	
<b>Fiery® System Version</b>	Fiery® FS600
<b>Configuration</b>	Embedded Type
<b>Memory</b>	8GB RAM (upgradable to 32GB)
<b>CPU</b>	Intel G7400E
<b>Storage</b>	500 GB NVMe SSD
<b>Operating System</b>	Linux

## Accessories

<b>A4/LT Large Capacity Input Tray (LCIT RT5190)**</b>	
<b>Paper Capacity</b>	4,400 sheets
<b>Paper Size</b>	8.5" x 11" (Optional extension accessory available for 8.5" x 14" paper)
<b>Paper Weight</b>	14 lb. Bond - 80 lb. Cover (52 - 216 gsm)
<b>Dimensions (W x D x H)</b>	13.8" x 21.3" x 24.6"
<b>Weight</b>	Less than 48.5 lbs.
<b>A3/DLT Large Capacity Input Tray (LCIT RT5180)</b>	
<b>Paper Capacity</b>	2,200 sheets
<b>Paper Size</b>	3.94 x 5.5" - 13" x 19.2"
<b>Paper Weight</b>	14 lb. Bond - 110 lb. Cover (52 - 300 gsm)
<b>Dimensions (W x D x H)</b>	34.2" x 28.7" x 25.9"
<b>Weight</b>	Less than 183 lbs.
<b>Banner sheet guide tray LCIT type S13 (for RT5180)</b>	
<b>Paper Capacity</b>	250 sheets
<b>Paper Size</b>	up to 13" x 27.5"
<b>Paper Weight</b>	14 lb. Bond - 110 lb. Cover (52 - 300 gsm)
<b>Vacuum Feed Large Capacity Input Tray (LCIT RT5150)</b>	
<b>Paper Capacity</b>	4,400 sheets (2,200 sheets x 2 Trays)
<b>Paper Size</b>	3.94" x 5.5" - 13" x 19.2"
<b>Paper Weight</b>	52 - 360 gsm
<b>Dimensions (W x D x H)</b>	41.5" x 28.7" x 39.4"
<b>Weight</b>	507 lbs.
Carbonless Paper supported with optional Carbonless Paper Unit Type S13	

<b>Bridge Unit BU5040 (Required for the VF LCIT RT5150)</b>	
Mechanical Registration included	
<b>Dimensions (W x D x H)</b>	8.2" x 28.7" x 39.4"
<b>Weight</b>	90 lbs.

<b>Vacuum Feed Banner Sheet Tray Type S9</b>	
<b>Paper Capacity</b>	730 sheets
<b>Paper Size</b>	8.27" x 16.54" - 13" x 27.5"
<b>Paper Weight</b>	52 - 360 gsm
Width of VF LCIT RT5150 will extend to 50.8"	

## Multi Bypass Tray (BY5020)

<b>Paper Capacity</b>	500 sheets
<b>Paper Size</b>	3.94" x 5.5" - 13" x 19.2"
<b>Maximum Paper size</b>	extends up to 13" x 27.5" by adding the optional Multi Bypass Oversize Sheet Tray Type S9
<b>Paper Weight</b>	14 lb. Bond - 80 lb. Cover (52 - 216 gsm)

## Cover Interposer (CI5040)

<b>Paper Capacity</b>	400 sheets (200 sheets x 2 Trays)
<b>Paper Size</b>	5.5" x 8.5" - 13" x 19.2"
<b>Paper Weight</b>	14 lb. Bond - 130 lb. Cover (52 - 350 gsm)
<b>Air Assist Weight</b>	Supported 110 lbs.

## Multi Folding Unit FD5040

<b>Folding Type</b>	Single Sheet Mode: Z-Fold, Half-Fold/Print inside, Half-Fold/Print outside, Letter Fold-in/Print inside, Letter Fold-in/Print outside, Letter Fold-out, Multiple Sheets Mode: Half-Fold/Print inside, Half-Fold/Print outside, Letter Fold-in/Print inside, Letter Fold-in/Print outside, Letter Fold-out
<b>Paper Size</b>	Single Sheet Mode: Z folding: 8.5" x 11" - 12" x 18"; Half folding: 8.5" x 11" - 13" x 19.2"; Letter folding: 8.5" x 11" - 12" x 18" Multiple Sheets Mode: Half folding: 8.5" x 11" - 13" x 19.2"; Letter Fold-in: 8.5" x 11" - 12" x 18"; Letter Fold-out: 8.5" x 11" - 8.5" x 14"
<b>Paper Weight</b>	Single Sheet Mode: 17 lb. Bond - 28 lb. Bond (64 - 105 gsm) Multiple Sheets Mode: 17 lb. Bond - 21 lb. Bond (64 - 80 gsm)
<b>Dimensions (W x D x H)</b>	8.2" x 28.7" x 39.4"
<b>Weight</b>	Less than 99 lbs.
<b>High Capacity Stacker (SK5040)</b>	
<b>Paper Capacity</b>	5,000 sheets
<b>Proof tray</b>	Additional 250 sheets
<b>Paper Weight</b>	52 - 360 gsm
<b>Rollaway Cart</b>	Standard and Optional additional carts available
<b>Dimensions (W x D x H)</b>	35.4" x 28.7" x 39.8"
<b>Weight</b>	297.6 lbs. (including rollaway cart)



Scan this QR code to see Product Video

#### Copy Tray Type M42

Paper Capacity	500 sheets
Paper Size	3.94" x 5.5" - 13" x 19.2"
Paper Weight	14 lb. Bond - 130 lb. Cover (52 - 360 gsm)
Dimensions (W x D x H)	13.8" x 19.7" x 6.7"
Weight	4.85 lbs.

#### 3,000-Sheet Finisher with 65-Sheet Stapler (SR5130)\*\*

Shift Tray	3.54" x 5.5" - 13" x 19.2"
Paper Capacity	3,000 sheets (LT_LEFT), 1,500 sheets or less for all other sheet sizes
Paper Weight	14 lb. Bond - 130 lb. Cover (52 - 360 gsm)
Proof Tray	
Paper Capacity	250 sheets
Paper Weight	14 lb. Bond - 80 lb. Cover (52 - 216 gsm)
Paper Size	3.54" x 5.5" - 13" x 19.2"
Staple-less Binding Unit	Optional
Staple	
Paper Size	7.25" x 10.5" - 11" x 17" - 2 to 65 sheets
Staple Paper Weight	Up to 105 gsm
Staple Position	Top, Bottom, 2 Staples, Top Slant, Bottom Slant
Dimensions (W x D x H)	25.9" x 28.7" x 38.6"
Weight	88.2 lbs.

#### 3,000-Sheet Booklet Finisher with 65-Sheet Stapler (SR5140)\*\*

Shift Tray	
Paper Capacity	3,000 sheets
Paper Weight	14 lb. Bond - 130 lb. Cover (52 - 360 gsm)
Proof Tray	
Paper Capacity	250 sheets
Paper Weight	14 lb. Bond - 80 lb. Cover (52 - 216 gsm)
Paper Size	3.54" x 5.5" - 13" x 19.2"
Output Jogger	Optional
Cooling Fan	Optional
Punch 2/3 hole	Optional
Staple	
Paper Size	7.25" x 10.5" - 11" x 17" - 2 to 65 sheets
Paper Weight	Up to 105 gsm
Position	Top, Bottom, 2 Staples, Top Slant, Bottom Slant
Saddle Stitch Staple	
Paper Size	8.5" x 11" - 13" x 18"
Paper Weight	64-80 gsm - up to 20 sheets
Position	2 at center
Dimensions (W x D x H)	25.9" x 28.7" x 38.6"
Weight	132.3 lbs.

#### Staple-less Binding Unit Type S16 (For SR5130 & SR5140 only)

Staple Position and Paper Size	Corner: 16 sheets: 8.5"x11"(SEF) - 11"x17" 2 spots: 12 sheets: 8.5"x11"(SEF) - 11"x17"
Paper Weight	52 - 105gsm *Binding quality is not guaranteed for paper less than 64 g/m <sup>2</sup> or over 80.1 g/m <sup>2</sup>

#### 4,500-Sheet Finisher with 100-Sheet Stapler (SR5110)

Paper Capacity	
Lower Shift Tray	3,500 sheets
Upper Shift Tray	1,000 sheets
Paper Weight	14 lb. Bond - 130 lb. Cover (52 - 360 gsm)
Punch 2/3 hole	Optional
Dimensions (W x D x H)	39.2" x 28.7" x 55.7"
Weight	298 lbs.

#### 3,500-Sheet Booklet Finisher with 100-Sheet Stapler (SR5120)

Paper Capacity	
Lower Shift Tray	2,500 sheets
Upper Shift Tray	1,000 sheets
Paper Weight Upper Tray	14 lb. Bond - 130 lb. Cover (52 - 360 gsm)
Paper Weight Lower Tray	14 lb. Bond - 130 lb. Cover (52 - 360 gsm)
Punch 2/3 hole	Optional
Saddle Stitch Staple	14 lb. Bond - 130 lb. Cover (52 - 350 gsm)
Paper Size	7.2" x 10.2" - 13" x 19.2"
Paper Weight	52 - 80 gsm up to 30 sheets / 120 pages
Dimensions (W x D x H)	39.2" x 28.7" x 55.7"
Weight	353 lbs.

#### Booklet Trimmer (TR5050 for SR5120 Finisher)

Trimming Type	One Side Edge
Trimming Capacity	up to 30 stapled and folded sheets / 120 pages (80 gsm)
Paper Size	7.2" x 10.2" - 13" x 19.2"
Stack Capacity	Up to 60 sets
Limitless Stack	Supported
Dimensions (W x D x H)	43.9" x 23.3" x 21.9"
Weight	166 lbs.

#### GBC StreamPunch Plus

Paper Sizes	5.5" x 8.5", 8.5" x 11", 8.5" x 14", 11" x 17", 12" x 18", 12.6" x 19.2", 13" x 19"
Paper Weight	20 lb. Bond - 110 lb. Cover (75 - 300 gsm)
Tab Punching	Supported
"Two-Up" Punching	Supported
Dimensions (W x D x H)	17.5" x 28.7" x 39.4"
Weight	220 lbs.

#### GBC StreamWire (GBC StreamPunch Plus is required)

Paper Sizes	8.5" x 11" (LEF)
Paper Weight	20 lb. Bond - 110 lb. Cover (75 - 300 gsm)
Number of Loops	8.5" x 11" (LEF) - 32 loops
StreamWire Supply	Black, White, or Silver
	Up to 30, 50, 60, 70, 80, or 100 Sheets
Tab Stock	Supported
Dimensions (W x D x H)	34" x 38" x 34"
Weight	500 lbs.

\*\* Different color scheme to that of mainframe and other accessories.

#### Plockmatic Square Back Trimmer

Trimming Type	One Side Edge
Three side Trimming	Manual feeding via Operator assisted process
Folding Type	Square Back Fold
Trimming Capacity	up to 30 stapled and folded sheets / 120 pages (80 gsm)
Paper Size	7.2" x 10.2" - 12.6" x 19"
Dimensions (W x D x H)	69.3" x 26" x 41.9"
Weight	392 lbs.

#### Plockmatic PBM435e Booklet Maker

Paper Size	5.7" x 8.3" - 12.6" x 26"
Paper Weight	17 lb. Bond - 110 lb. Cover (64 - 300 gsm)
Set Size	2 - 35 sheets - 80 gsm 2 - 50 sheets - 80 gsm (PBM 50-sheet upgrade kit needed)
Dimensions (W x D x H)	59.5" x 28.3" x 44.5" (includes output stacker)
Weight	500 lbs.
Optional	50-sheet upgrade kit, FM400e Finishing Module, CT XL, and BST4000 High Cap Belt Stacker

#### Additional Accessories

Envelope Fusing Unit, Decurl Unit DU5080, Buffer Pass Unit Type S9, Bridge Unit BU5020, Media Identification Unit, PostScript3 Unit Type M42, IPDS Unit Type M42, VM Card Unit P18, OCR Unit Type M13, 8 1/2" x 14" Paper Size Tray Type S18, Multi Bypass Banner Sheet Tray Type S9 (for Multi Bypass Tray BY5020), A3/11" x 17" Tray Unit Type M26, Optional Feed Roller Unit Type S18, Carbonless Paper Unit Type S18, SR4000 series Output Tray for Banner Sheet Type S6 (for SR5110/5120), SR5000 series Output Tray for Banner Sheet Type S6 (for SR5130/5140)

#### Consumables

CMY Toner Yield	30K prints/bottle*
K Toner Yield	34K prints/bottle*
Waste Toner Bottle Yield	110K prints/bottle*

\*Based on 8.75% coverage (Letter)

TCRU Program	Supported
--------------	-----------

#### Workflow Solutions Supported

Ricoh Streamline NX, Ricoh Global Scan NX, Ricoh Integrated Cloud Environment, Ricoh Smart Integration, RICOH ProcessDirector™, RICOH, RICOH TotalFlow BatchBuilder, RICOH @Remote, ePS™ DigitalStoreFront™, Fiery Color Profiler Suite, Fiery® Graphic Arts Pro, Fiery ColorRight, Fiery Automation, Fiery Central, Objectif Lune

Specifications subject to change without notice.



NEW IDEAS. NEW SOLUTIONS.

330 Fairfield Road Fairfield, NJ 07004  
www.eosnj.com PH: (973) 808-0100



RICOH