

# EvolutionNext

TASKalfa MZ7001ci Series & MZ7001i Series

- + A3 color copy, print, scan, and optional fax in 1 device
- + Cloud connectivity out of the box
- + Up to 70 ppm and up to 274 ipm
- + True 1200 x 1200 dpi with advanced finishing



The TASKalfa MZ7001ci Series is our follow up to the Evolution Series - EvolutionNext. This product series includes 6 Color multifunction printers and 4 Black and White multifunction printers from 25 to 70 ppm. This series offers built-in cloud connectivity, industry-leading reliability, and AI capabilities in a sustainable design.



## Cloud ready for complete control

Pre-installed cloud applications simplify document capture, release, and management, saving time and resources.



## Taking productivity further

AI-powered features eliminate errors while industry-leading dual scan processors streamline high-volume scanning.



## Award-winning reliability

Durable components last up to three times longer than competing models. BLI named Kyocera the 2024-2026 Most Color Consistent A3 Brand and the 2025-2027 Most Reliable A3 Brand.



## Security by design

FIPS 140-3 compliance and advanced authentication provide the highest level of security.




## Cost-efficient sustainability

Our toner lock technology reduces the need for service calls and minimizes waste.



Color or B&W	Brand/Family TASKalfa	Product Type M = MFP	Product Format Z = A3	Print Speed 25-70ppm	Version	Functionalities/ Identifier (c) Color (i) HyPAS enabled
Color	TASKalfa	M	Z	25/35/40/50/60/70	01	ci
B&W	TASKalfa	M	Z	40/50/60/70	01	i

# Product Configuration: TASKalfa MZ700lci Series at a Glance

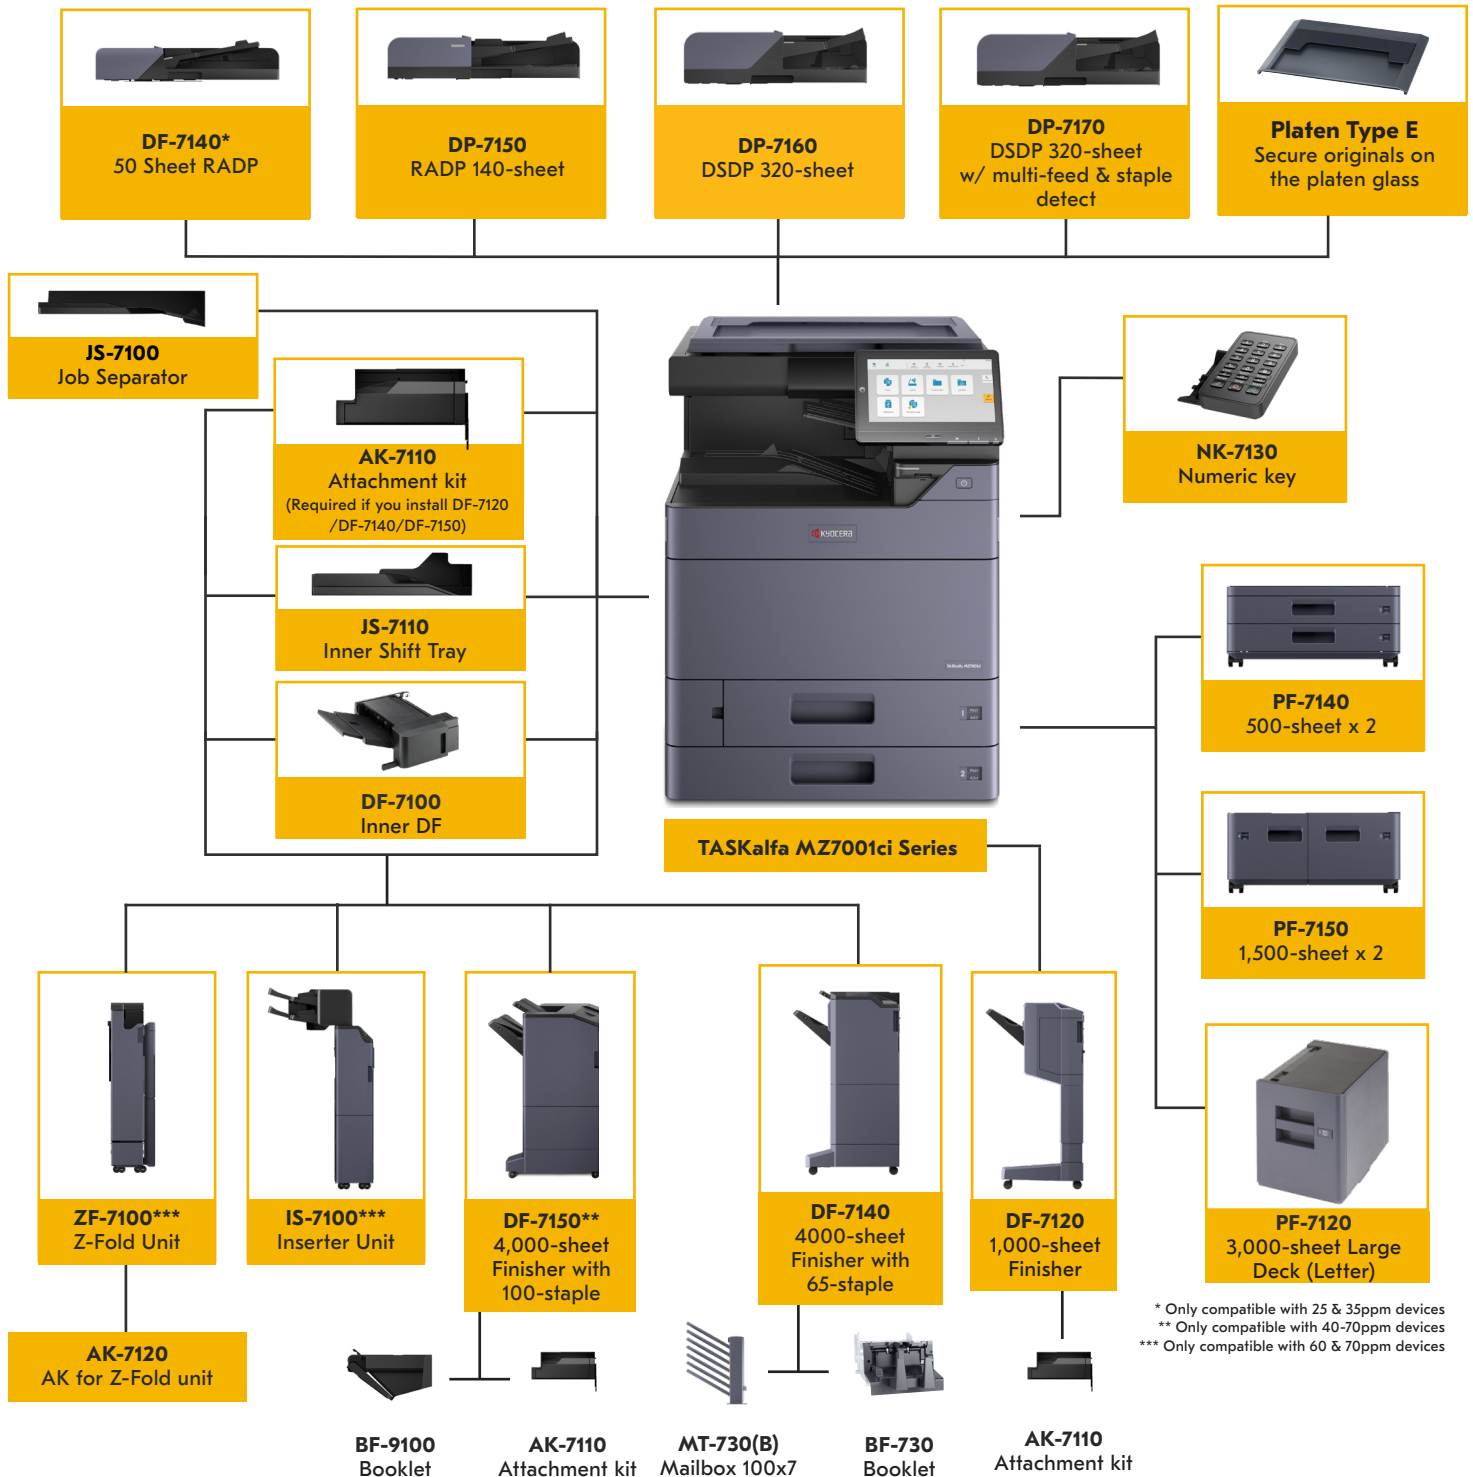

## Internal Punch Unit

- + PH-7100 — 2 and 3 hole punch capabilities for paper sizes between 5.5" x 8.5" — 12" x 18"



## External Punch Unit

- + PH-7A — 2 and 3 hole punch capabilities for paper sizes between 5.5" x 8.5" — 12" x 18"



## Device Accessories

- + DT-730B hard copy holder
- + Banner Guide 10 for easier banner paper feeding
- + Keyboard Holder 10 for optional keyboard



## Memory Accessories

- + HD-16 HDD (1TB)



## Connectivity Accessories

- + Fax system 12 for fax capabilities
- + Internet Fax Kit (A) for internet fax capabilities
- + UG-33/34 for optimal printer emulation



## Software Accessories

- + Card Authentication Kit (B) for more secure printing
- + Scan Extension Kit (A), an extended option for OCR scanning



## Fiery Print Controller

- + Fiery® Printing System 17
- + Interface Kit 15 (B)

# Configure your TASKalfa device!

For more details on how to configure your device to match the needs of your office, navigate to our product configurator. The tool aims to pair you to the device configuration\* that fits your specific business needs.

Scan or click the QR codes on this page to discover the solutions for you.



## Integration with Kyocera solutions

Features		KCC	KCIM	KCPS	DMConnect	PinPoint Scan
Document Capture	Capture, classify, process, and route documents to on-prem/cloud storage, DMS, ECM, and ECM	●			●	●
Connect to Cloud Storage	Not only send scanned documents but process them before sending to cloud storage	●		●		
Document Management	A DMS includes features such as version control, document indexing, search, and secure access control to enhance security and productivity.		●			
Print Management	Streamline and optimize printing activities by managing print jobs, controlling costs, tracking output, and enhancing security.			●		

Kyocera Cloud Capture (KCC)



Kyocera Cloud Print and Scan (KCPS)



Kyocera Cloud Information Manager (KCIM)



DMConnect



PinPoint Scan



\*Kyocera Document Solutions does not warrant that any specifications mentioned will be error-free. Specifications are subject to change without notice. All other brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

## TASKalfa MZ7001ci Series & MZ7001i Series

### MAIN UNIT

**Type:** B&W Laser MFP (40-70ppm);  
Color Laser MFP (25-70ppm)

**Functions:** **Standard:** Print, Copy, Scan;  
**Optional:** Fax

**Control Panel:** 10.1" Color Touch Screen

**Memory:** 4 GB RAM

**Solid State Drive/Hard Disk Drive:** Standard:  
256 GB SSD; Optional: 1 TB HDD

**Interface Connection:** Network: 1000Base-T/100Base-Tx/10BASE-T (IPv6, IPv4, IPSec),  
IEEE 802.3az; Other Standard: USB 2.0 (Hi-Speed USB), USB 3.0 (Super-Speed USB)

**Paper Capacity:** Standard: 1,150 Sheets;  
Maximum: 7,150 Sheets

**Paper Sources:** Standard: (2) 500 Sheet Paper  
Trays & (1) 150 Sheet Multi-Purpose Tray;  
Optional: (2) 500 Sheet Paper Trays, (1) Dual  
1,500 Sheet Paper Trays, Cabinet Stand, and  
3,000 Sheet Large Capacity Side Tray

**Finishing Capabilities:** Internal Options: Stack,  
Staple, 2 and 3 Hole Punch, Job Separator,  
Inner Shift Tray

External Options: 1,000 Sheets (50-Sheet  
Staple), 4,000 Sheets (65-Sheet Staple &  
100-Sheet Staple), 2 and 3 Hole Punch, Booklet  
and Tri-Fold Units, 7-Bin Mailbox, Z-Fold Unit,  
Inserter Unit

**NOTE:** 4,000 Sheet External Finisher (100-Sheet  
Staple) only available on 40-70ppm MFPs,  
Z-Fold Unit and Inserter Unit only available on  
60-70ppm MFPs

### Supported Media Types:

Cassette: Plain, Vellum, Recycle, Preprint, Bond,  
Hagaki, Color, Punched, Letterhead, Thick,  
Envelope, High Quality, Custom

Multi-Purpose Tray: Plain, Transparency (OHP  
film), Vellum, Labels, Recycle, Preprint, Bond,  
Hagaki, Color, Punched, Letterhead, Thick,  
Envelope, Coated, High Quality, Index Tab  
Dividers, Custom

### Supported Media Sizes:

Cassette 1: 5.5" x 8.5" — 8.5" x 14" (statement to  
legal) Cassette 2: 5.5" x 8.5" — 12" x 18",  
Custom Size

Multi-Purpose Tray: 5.5" x 8.5" — 12" x 18"  
(multiple); to 12" x 48" Banner (single)

**Paper Weight:** Cassette 1, Cassette 2, and  
Multi-Purpose Tray: 14 lb. Bond — 166 lb. Index  
(52 — 300gsm)

### Print Speed (B&W and Color):

MZ2501ci: Up to 25ppm Letter, 15ppm Legal,  
and 12ppm Ledger

MZ3501ci: Up to 35ppm Letter, 21ppm Legal,  
and 17ppm Ledger

MZ4001ci: Up to 40ppm Letter, 24ppm Legal,  
and 20ppm Ledger

MZ5001ci: Up to 50ppm Letter, 30ppm Legal,  
and 25ppm Ledger

MZ6001ci: Up to 60ppm Letter, 36ppm Legal,  
and 30ppm Ledger

MZ7001ci: Up to 70ppm Letter, 42ppm Legal,  
and 35ppm Ledger

### Print Speed (B&W)

MZ4001i: Up to 40ppm Letter, 24ppm Legal,  
and 20ppm Ledger

MZ5001i: Up to 50ppm Letter, 30ppm Legal,  
and 25ppm Ledger

MZ6001i: Up to 60ppm Letter, 36ppm Legal,  
and 30ppm Ledger

MZ7001i: Up to 70ppm Letter, 42ppm Legal,  
and 35ppm Ledger

### Warm Up Time:

MZ2501ci & MZ3501ci: 9.7 sec or less

MZ4001i, MZ5001i, MZ6001i, & MZ7001i:  
14.4 sec or less

MZ4001ci, MZ5001ci, MZ6001ci:  
14.4 sec or less

MZ7001ci: 25 sec or less

**Dimensions (W x D x H):** Approximately  
23.7" x 26.1" x 31.1" (602mm x 663mm x  
790mm) for all models

### Weight:

MZ4001i, MZ5001i, MZ6001i, & MZ7001i:  
Approximately 182 lbs. (83 kg)

MZ2501ci & MZ3501ci:  
Approximately 198.4 lbs. (90 kg)

MZ4001ci, MZ5001ci, MZ6001ci, MZ7001ci:  
Approximately 209.4 lbs. (95 kg)

### PRINT SPECIFICATIONS

**Print Resolution:** True: 1200 dpi x 1200 dpi;  
Enhanced: Up to 4800 dpi x 1200 dpi

**PDLs/Emulations:** PCL6 (PCL XL/PCL 5c) for  
TASKalfa MZ2501ci, 3501ci, 4001ci, 5001ci,  
6001ci, & 7001ci; PCL6 (PCL XL/PCL 5e) for  
TASKalfa MZ4001i, 5001i, 6001i, & 7001i;  
PRESCRIBE, KPDL3 (PostScript3 compatible)  
AES Support, PDF, XPS/OpenXPS, PPML,  
Microsoft WPP and Universal Print

### Mobile Devices & Cloud Ready Printing:

Apple AirPrint®, Mopria®, Kyocera Cloud Print  
and Scan (KCPS), KYOCERA Mobile Print, &  
KYOCERA MyPanel

**Fonts:** 93 Fonts (PCL6), 136 Fonts (KPDL3), 4  
Fonts (Calibri), 4 Fonts (Cambria), 1 Font Bitmap  
font, 79 Outline fonts

**Operating Systems:** Windows: 10/11; Server  
2016/Server 2019/Server 2022/Server 2025;  
Mac OS X v10.0 or later; Chrome OS

### COPY SPECIFICATIONS

#### First Copy Out Time:

MZ2501ci: 6.4 seconds or less (B&W), 8.5  
seconds or less (Color)

MZ3501ci: 5.3 seconds or less (B&W), 7.0  
seconds or less (Color)

MZ4001ci: 4.5 seconds or less (B&W), 5.9  
seconds or less (Color)

MZ5001ci: 3.7 seconds or less (B&W), 4.8  
seconds or less (Color)

MZ6001ci & MZ7001ci: 3.4 seconds or less  
(B&W), 4.4 seconds or less (Color)

MZ4001i: 4.5 seconds or less

MZ5001i: 3.7 seconds or less

MZ6001i & MZ7001i: 3.4 seconds or less

**Copy Resolution:** 600 dpi x 600 dpi

**Continuous Copy:** Up to 9,999 Sheets

#### Magnification (Manual Mode):

25% to 400%, 1% increments

**Auto Mode Enlargements:** 25%, 50%, 70%,  
81%, 86%, 100%, 115%, 122%, 141%, 200%, 400%



## TASKalfa MZ7001ci Series & MZ7001i Series Specifications

### SCAN SPECIFICATIONS

#### Types:

(2) Reverse Automatic Document Processors - DP-7140 & DP-7150  
(2) Dual Scan Document Processors - DP-7160 & DP-7170

**Document Processor Paper Capacity:** DP-7140: 50 Sheets; DP-7150: 140 Sheets; DP-7160 & DP-7170: 320 Sheets

#### Document Processor Supported Media Sizes:

DP-7140: Min: A5-R/Statement-R 5.5" x 8.5" (140 x 182mm), Max: A3/Ledger 11" x 17" (297 x 432mm), Banner: (297 x 1,600mm)  
DP-7150: Min: A6-R/Statement-R 5.5" x 8.5" (105 x 148mm), Max: A3/Ledger 11" x 17" (297 x 432mm), Banner: (297 x 1,600mm)  
DP-7160 & DP-7170: Min: A6-R/Statement-R 5.5" x 8.5" (105 x 148mm), Max: A3/Ledger 11" x 17" (297 x 432mm), Banner: (297 x 1,600mm)

#### Document Processor Supported Media

##### Weights:

DP-7140 & DP-7150: Simplex: 13 lb. Bond — 90 lb. Index (35 to 160 gsm), Duplex: 16 lb. — 32 lb. Bond (50 to 120 gsm)  
DP-7160 & DP-7170: Simplex: 13 lb. Bond — 120 lb. Index (35 to 220 gsm), Duplex: 16 lb. — 120 lb. Index (50 to 220 gsm)

#### Document Processor Speed:

DP-7140: Simplex: 50 ipm; Duplex: 16 ipm (B&W/Color)  
DP-7150: Simplex: 80 ipm; Duplex: 48 ipm (B&W/Color)  
DP-7160 & DP-7170: Simplex: 137 ipm; Duplex: 274 ipm (B&W/Color)

**Cloud Ready Services:** Kyocera Cloud Capture (KCC), Kyocera Cloud Information Manager (KCIM), Kyocera Cloud Print and Scan (KCPS)

**Resolution:** Platen Glass: 600 dpi x 600 dpi, Document Processor: 600 dpi x 600 dpi / 600 dpi x 300 dpi

**File Format:** TIFF, JPEG, XPS, OpenXPS, PDF, Searchable PDF, MS Office File

### OPTIONAL FAX SPECIFICATIONS

**Modem Speed:** G3: 33.6kbps

**Compression Method:** MMR,MR,MH,JBIG

**Resolution:** 600 dpi x 600dpi, 400 dpi x 400 dpi, 200 dpi x 400 dpi, 200 dpi x 200 dpi, 200 dpi x 100 dpi

**Sending/Recording Size:**

Statement-R to 11" x 17"

**Number of Transmission Lines:** 1 standard line, up to 2 lines

**Transmission Time:** < 3 seconds when using JBIG

**Fax Server Transmission Method:** SMTP/POP3 Via Server/SMTP Direct Communication (DirectSMTP)

**Driver:** Network Fax Driver

**Memory Backup:** Network Fax, Duplex Transmission and Reception, Encrypted Transmission and Reception, Polling Transmission and Reception, Broadcast, Fax Server Integration, Fax Dedicated Paper Feed Tray, Fax Forwarding to email or file

### SECURITY SPECIFICATIONS

**Guarded Access:** LDAP, IP Filtering, Secure Print Release, SMTP Authentication, Create Encrypted PDF, Failed Authentication Lockout, Card Authentication

**Protected Data Storage:** SSD/HDD Overwrite, AES 256 Data Storage Encryption, Trusted Platform Module, IEC-15408, Common Criteria, IEEE 2600 Certified, HCD-PP Certified

**Secure Communication:** TLS v1.3, SMB 3.1.1, HTTPS, ECDSA, FIPS 140-3 Encryption, S/MIME, IPsec with HCD-PP, IPPS Printing (Over TLS), SCEP Certificated Enrollment, OSCP/CRL Certificates, 802.1X Ethernet Certificates, SHA 2 384

**Advanced Management:** 3 Preset Security Level Configurations, Remote Management of Fleet, SNMP v3 Monitoring, SIEM/Syslog Monitoring, Secure Boot Check, Run Time Integrity Checks, Allow List

### ENVIRONMENTAL SPECIFICATIONS

**Operating Environment:** Temperature: 50 F - 90.5 F (10 - 32.5°C); Humidity: 10 - 80% RH (Relative Humidity)

**Power Requirements:** MZ7001ci: 120V, 60Hz, 16A, 2400W; 220-240V, 50/60Hz, 10A, 2400 W

**Power Consumption:** All other models: 120V, 60Hz, 12A, 1650W; 220-240V, 50/60Hz, 7.2A, 1750W

**Sleep Mode:** Color MFPs: 0.5W, B&W MFPs: 0.4W

#### Typical Electricity Consumption (TEC) Rating:

MZ2501ci: 0.29 kWH (120V);

0.30 kWH (220-240V)

MZ3501ci: 0.46 kWH (120V);

0.43 kWH (220-240V)

MZ4001ci: 0.52 kWH (120V);

0.50 kWH (220-240V)

MZ5001ci: 0.66 kWH (120V);

0.63 kWH (220-240V)

MZ6001ci: 0.83 kWH (120V);

0.79 kWH (220-240V)

MZ7001ci: 1.05 kWH (120V); 1.01 kWH (220-240V)

MZ4001i: 0.49 kWH (120V); 0.47 kWH (220-240V)

MZ5001i: 0.63kWH (120V); 0.60 kWH (220-240V)

MZ6001i: 0.80 kWH (120V); 0.77 kWH (220-240V)

MZ7001i: 0.98 kWH (120V); 0.93 kWH (220-240V)

**Standards:** Energy Star and EPEAT

### CONSUMABLES

#### Toner:

MZ2501ci & MZ3501ci: TK-8467C/M/Y/K

MZ4001ci, MZ5001ci, MZ6001ci, MZ7001ci:

TK-8597C/M/Y/K

MZ4001i, MZ5001i, MZ6001i, MZ7001i: TK-6357K

#### Toner Yield (Estimated at 5% Coverage):

TK-8467C/M/Y/K: 20,000 Pages; TK-8467K: 30,000 Pages

TK-8597C/M/Y/K: 24,000 Pages; TK-8597K: 40,000 Pages

TK-6357K: 40,000 Pages

Specifications and design are subject to change without notice.

For the latest on connectivity visit [kyoceradocumentsolutions.us](http://kyoceradocumentsolutions.us).

ECOSYS, PRESCRIBE, Kyocera Net Manager, Kyocera Net Viewer, Kyocera Device Manager, PDF Direct Print, Command Center RX, and KX Driver are trademarks of The Kyocera Companies. Mac OS and AirPrint are trademarks of Apple, Inc. Mopria is a trademark of Mopria Alliance, Inc. Windows is a trademark of Microsoft, Inc. All other trademarks are the property of their respective owners.



NEW IDEAS. NEW SOLUTIONS.

[www.electronicofficesystems.com](http://www.electronicofficesystems.com) PH: (973) 808-0100

330 Fairfield Road Fairfield, NJ 07004